

Digi-Wave™ DLR-50

Digital Receiver

USER GUIDE




Operating Instructions

Compatible with WSC DLT-100 only.

1. Two AAA batteries must be inserted into the DLR. Be sure to observe correct polarity.
2. Power on/off by holding the power button for 2 seconds.
3. In interpretation mode, DLR will seek an active DLT. Press the channel button up or down to seek the next active DLT. In two-way mode, group must be selected.
4. Display will flash 88 if not synched with DLT-100.
5. If the units are synched, briefly push the power button to show group assigned, 0 to 99.
6. To change group, hold the Up and Down channel buttons for 3 seconds until "Gr" and number is flashing.
7. Use volume up/down buttons to select group number.
8. Hold Up and Down channel buttons for 2 seconds again to store change.
9. To change volume level press Up or Down volume buttons, display will show L0 through L9. (Default at turn on is L6)
10. Users can listen using the speaker on the front of the DLR or by plugging in stereo or mono earphones into the jack (which defeats the speaker operation).

11. Low battery indicator will show as LO on the display.
12. The DLR will automatically power down after 1 minute if not synched with the DLT.

Button Functions

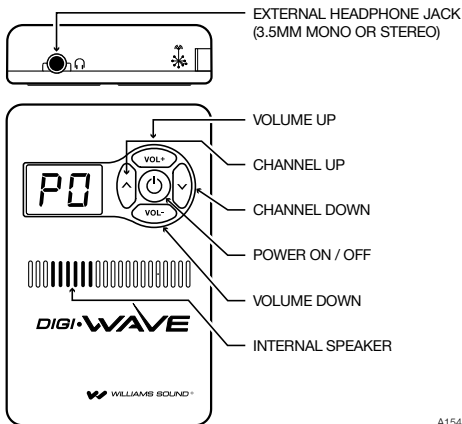

A154

Safety Information

HEARING SAFETY

CAUTION!

This product is designed to amplify sounds to a high volume. To protect your hearing and the hearing of others:

1. Make sure the unit is OFF or the volume is turned down before putting on the earphones.
2. Set volume level at the minimum setting you need to hear.
3. Do not allow children or other unauthorized persons to have access to this product.

MEDICAL DEVICE SAFETY

CAUTION!

Before using this product with a pacemaker or other implantable medical device, consult your physician or the manufacturer of the device to make sure that you are using this product in accordance with their safety guidelines.

Specifications

Battery type	(2) AAA
Battery life	Up to 24hrs (Alkaline)
Channels	Up to 15 simultaneous channels (Interpretation mode) Up to 4 simultaneous groups
Operating frequencies	2.4GHz (ISM band)
Range	Up to 100ft outdoors and 200ft indoors*
Speaker	Internal speaker (disabled when ear jack is engaged)
Indicators	LCD (Group, channel, volume level, battery status, mode)
Approvals	FCC, Industrie Canada, CE, C-tick, RoHS, WEEE
Warranty	2 years parts and labor (90 days on most accessories).

*Depending on environmental conditions

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Recycling Instructions

Help Williams Sound protect the environment!



Please do not dispose of equipment or used batteries in the household trash. Take the equipment to an electronics recycling center or return to the factory. Take batteries to a retail or community recycling location.

Limited Warranty

Williams Sound products are engineered, designed and manufactured under carefully controlled conditions to provide you with many years of reliable service. Williams Sound warrants the DLR 50 receiver against defects in materials and workmanship for two (2) years. During the first two years from the purchase date, we will promptly repair or replace the DLR 50 receiver.

Earphones, headphones, cables, carry cases, and all other accessory products carry a 90-day warranty.

WILLIAMS SOUND HAS NO CONTROL OVER THE CONDITIONS UNDER WHICH THIS PRODUCT IS USED. WILLIAMS SOUND, THEREFORE, DISCLAIMS ALL WARRANTIES NOT SET FORTH ABOVE, BOTH EXPRESS AND IMPLIED, WITH RESPECT TO THE DLR 50 RECEIVER, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

WILLIAMS SOUND SHALL NOT BE LIABLE TO ANY PERSON OR ENTITY FOR ANY MEDICAL EXPENSES OR ANY DIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES CAUSED BY ANY USE, DEFECT, FAILURE OR MALFUNCTION OF THE PRODUCT.

This device complies to “RSS-Gen Issue 2 June 2007” for Industry Canada and FCC part 15.105(b) for the United States.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This device complies with ICES-003 class B. Test data is available from the manufacturer on request.

This device complies with FCC part 15.105 (b)

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment is a handheld device and should be maintained with a minimum safety distance of 20cm from the antenna. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Customer Service

If you experience difficulty with your system, call Toll-Free for Customer Assistance:

1-800-843-3544 (U.S.A.) or

+1 952 943 2252 (Outside the U.S.A.)

If it is necessary to return the system for service, your Customer Service Representative will give you a Return Authorization Number (RA) and shipping instructions.

Pack the system carefully and send it to:

Williams Sound

Attn: Repair Dept.

10300 Valley View Rd.

Eden Prairie, MN 55344



10300 Valley View Rd • Eden Prairie, MN 55344
800-328-6190 / 952-943-2252 • FAX: 952-943-2174
www.williamssound.com